

Channel Grating & Bearer Bars

Ductile Iron Grating & Bearer Bars

EN1433 Class D400

Four point locking of grating




18mm slot width

750mm Length

Enlarged grouting flange on bearer bars for secure retention in concrete

Material Grade: Ductile Iron Grade EN-GJS-500 to BD EN 1563:2011

Coating: Temporary bitumen based paint coating to BS 3416:1991 (Epoxy coating available on request)

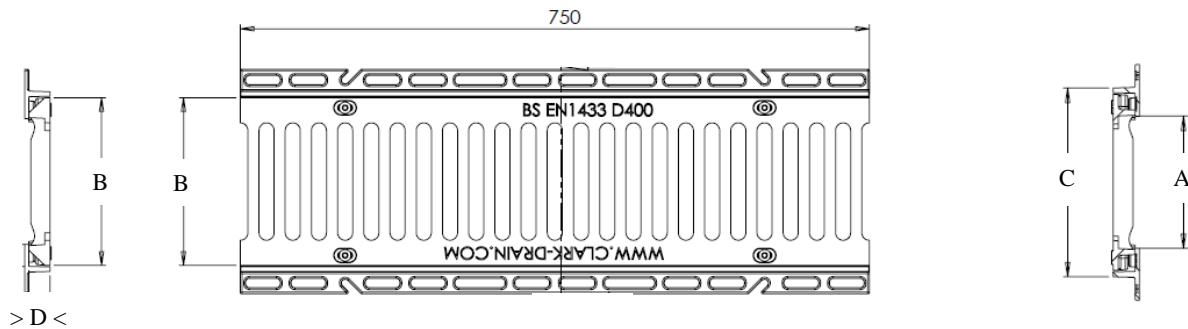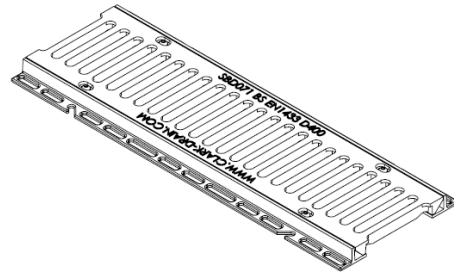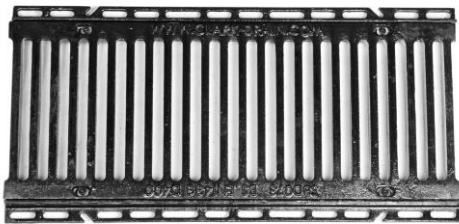

Clark-Drain Reference	Internal Clear Opening A (mm)	Over Grate Width B (mm)	Over Frame Width C (mm)	Depth of Frame D (mm)	Length (mm)
CD D0715	100	150	165	25	750
CD D0720 (CD D071)	150	200	215	25	750
CD D0725 (CD D072)	200	250	265	25	750
CD D0730 (CD D073)	250	300	315	25	750
CD D0735	300	350	365	25	750
CD D0740 (CD D074)	350	400	415	25	750
CD D0745	400	450	465	25	750
CD D0750 (CD D075)	450	500	515	25	750
CD D0755	500	550	565	25	750
CD D0760 (CD D076)	550	600	615	25	750

Due to our continuous product improvement program features and sizes may be subject to change without notice

Clark-Drain Ltd

Registered Office: Station Road, Yaxley, Peterborough. PE7 3EQ

Telephone: +44 (0) 1733 765317 Email: sales@clark-drain.com

www.clark-drain.com

Registered in England No. 1397422